

HTS-5r14 - 277 Series

Energy Efficient LED Lighting
70 - 150 Watt Replacement

SPECIFICATIONS

**UL and CUL rated #E326977

**MADE IN THE U.S.A

FEATURED HIGHLIGHTS

- * Unlimited application possibilities due to retrofitting
- * Saves up to 79% of energy consumption
- * 100,000 hour lifespan 5yr. Manufactures registered warranty
- * return on investment between 18 and 40 months

The HTS 5r14 Series was specifically designed for wall packs and decorative lighting retrofits. Its superior heat management and compact design make it ideal for retrofitting in existing fixtures, for 10+ years of maintenance free service.

OUTPUT SPECIFICATIONS

ENVIRONMENTAL FEATURES

- * Contains no mercury or lead
- * Does not produce UV rays
- * Does not attract insects
- * Directional light means no light pollution

*High brightness LED	
*Number of Diodes	14
*Source power	29—34Watts
*CRI	74.70
*Lumens	2,256 — 2,413 at 100%
*Efficacy	81.38 LM/W
*Chromaticity: White Light	5000K
*Junction Temperature	<60°C
*IESNA Tested	LM79 & LM80
*Operating Range	-40°C to 70°C
*Nominal Lumens per watt	180W
Viewing Angle	120°
*EMC:	Compliant to 47 CFR, part 2, 15

ELECTRICAL SPECIFICATIONS






- * 47 to 63 Hertz ac line power voltage from 90 VAC RMS to 277 VAC RMS
- * Available to 480 VAC
- * Nominal operating efficiency is 85% typical at 230 VAC and maximum load
- * Driver provides surge protection at 305 VAC
- * Power distributed to onboard drivers per seven LED lights

ASSEMBLY

- *Metal Core Board
- *One piece aluminum heat sink dissipates heat
- *Vibration resistant
- *ASTM and NEMA Tested

APPLICATIONS

- *Wall Packs
- *High Bay Fixtures
- *Parking Garages
- *Parking lots
- *Gas Station Canopies

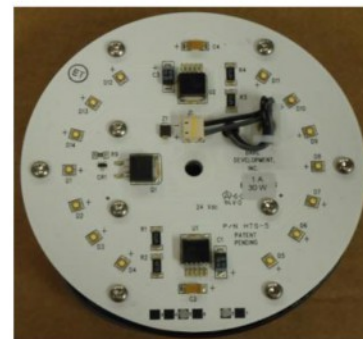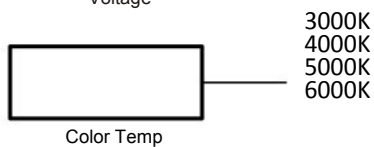

Dimensions

5" Dia. x 1.50"

Weight: Driver & LED board 2 Lbs

